

UNB

The CASSIOPE Satellite Ionospheric Profiling Experiment

Richard B. Langley and Don Kim

Geodetic Research Laboratory
Dept. of Geodesy and Geomatics Engineering
University of New Brunswick
Fredericton, N.B.

URSI 2007, North American Radio Science Meeting, Ottawa, 22-26 July 2007

CASSIOPE


- CASSIOPE = CAScade Smallsat and IOnospheric Polar Explorer

(also low tufted evergreen shrubs of colder parts of north temperate regions having mosslike foliage and nodding white or pink flowers; a.k.a. heather)


- Canada's first multipurpose satellite
- Merger of CASCADE (very wide bandwidth store-and-forward data delivery platform) with e-POP (enhanced - Polar Outflow Probe)
- Planned late 2008 launch

CASSIOPE Orbit - 1

Semi-major axis	7280 km
Period	103 minutes
Eccentricity	0.08
Apogee	1500 km
Perigee	325 km
Inclination	80°

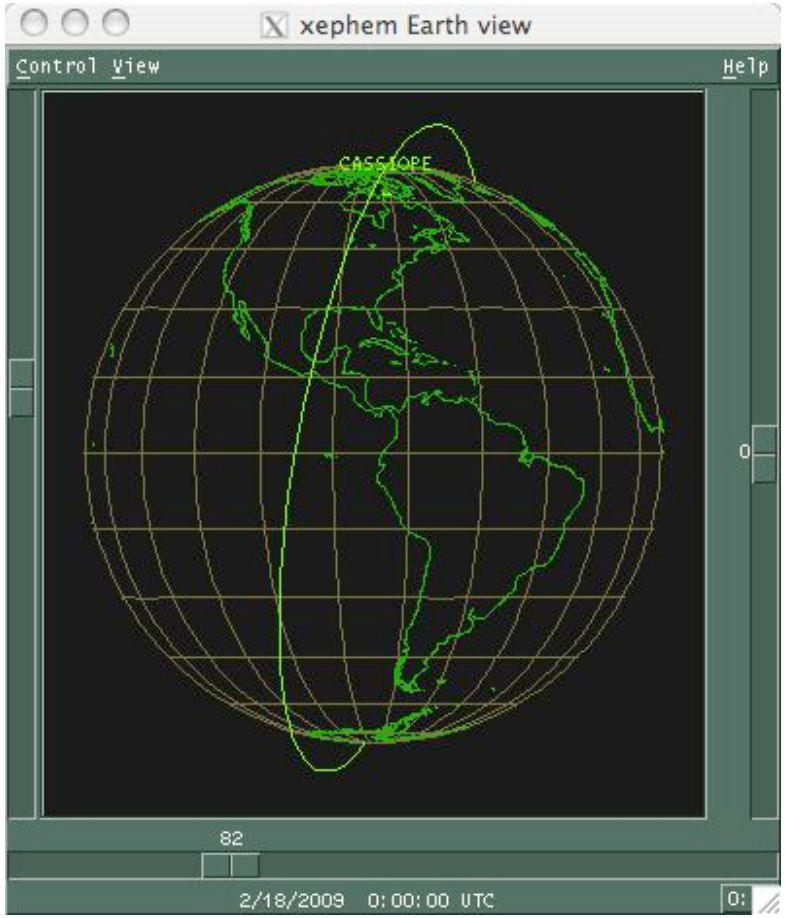

CASSIOPE Orbit - 2

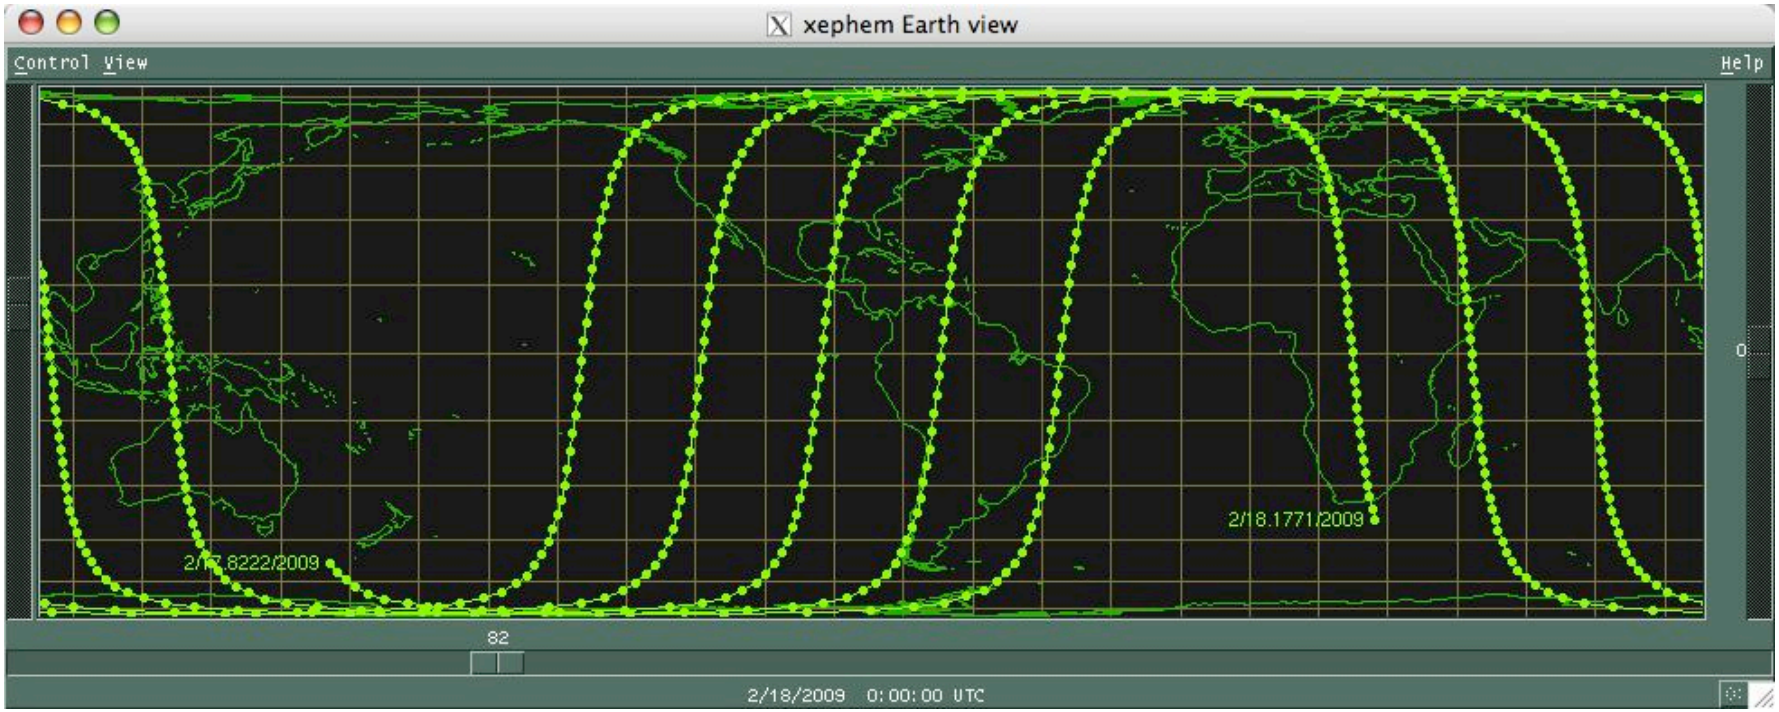

e-POP Mission Objectives

- Investigate atmospheric and plasma flows and related wave-particle interaction and radio wave propagation in the topside ionosphere
- Quantify the micro-scale characteristics of plasma outflow and related micro- and meso-scale plasma processes in the polar ionosphere
- Explore the occurrence morphology of neutral escape in the upper atmosphere
- Study the effects of auroral currents on plasma outflow.


Players

- Funded by the Canadian Space Agency and the Natural Sciences and Engineering Research Council of Canada
- e-POP team includes researchers at 10 Canadian universities plus government agencies in Canada, the U.S.A., and Japan
- Chief e-POP scientist: Andrew Yau, U. of C.
- Deputy mission scientist: Gordon James, C.R.C.
- CASSIOPE spacecraft prime: MDA
- Spacecraft bus and some instrument development: Bristol Aerospace

e-POP Instruments

- Imaging Rapid-scanning Ion Mass Spectrometer (IRM)
- Suprathermal Electron Imager (SEI)
- Magnetic Field Instrument (MGF)
- Fast Auroral Imager (FAI)
- Radio Receiver Instrument (RRI)
- Neutral Mass and Velocity Spectrometer (NMS)
- Coherent Electromagnetic Radiation (CER)
- GPS Attitude, (Positioning) and Profiling Experiment (GAP)

CASSIOPE

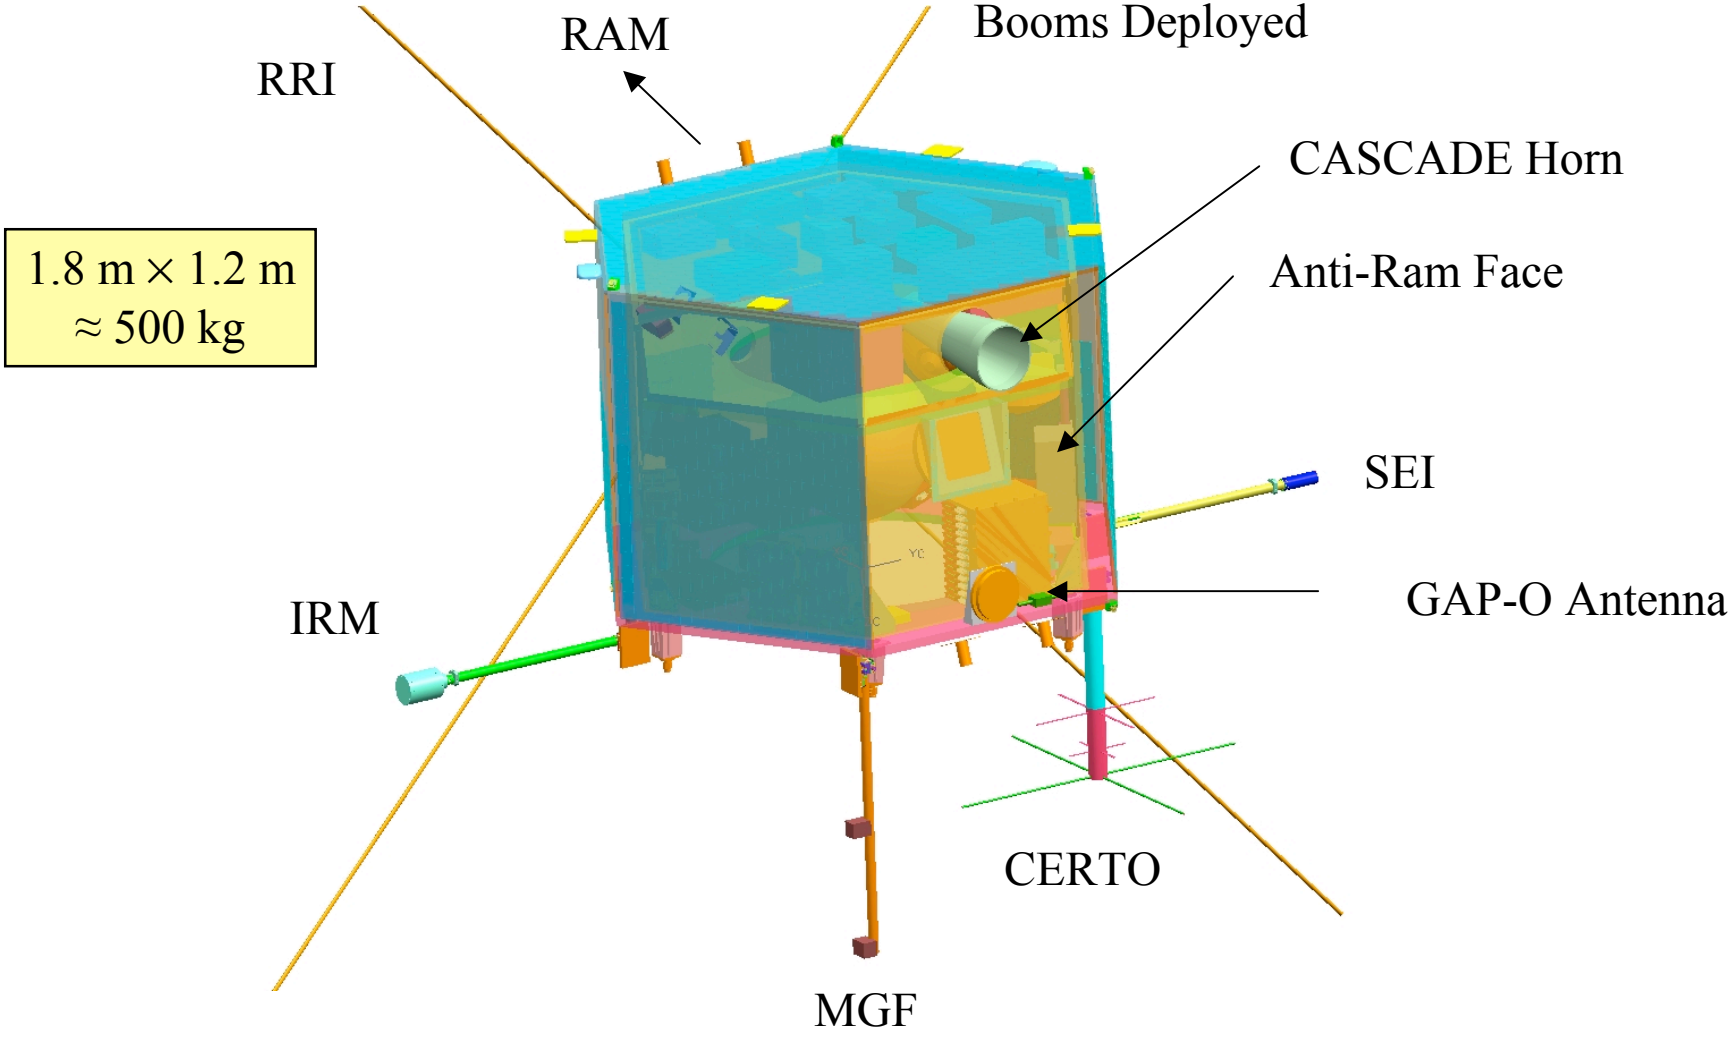

1.8 m × 1.2 m
≈ 500 kg

Background image courtesy of Bristol. S/C is for illustrative purposed only.

GAP Objectives-1

The GPS Attitude and Profiling instrument is multipurposed. It is both a spacecraft sensor and a science instrument. It will determine:

- spacecraft three-dimensional position, velocity, and attitude
- time referenced to UTC
- ionospheric electron density profiles

Functions divided into GAP-A and GAP-O

GAP Objectives-2

GAP-A

- Position, velocity, attitude, and time can be determined in *real time* and made available to other spacecraft systems (1 Hz):
  - position to 100 metres
  - velocity to 10 metres per second
  - attitude to 5 degrees
  - time to 1 microsecond

- More accurate results will be achievable from down-linked data including attitude to 0.5 degrees and position to a few dm or better.

- Ionospheric science also possible with GAP-A.

GAP Objectives-3

GAP-O

- Electron density profiling using antenna pointed in anti-ram direction
- High-rate (20, possibly 50 Hz) measurements on setting (occulted) GPS satellites together with measurements from non-occulted satellites down linked to ground for analysis
- Analysis will provide high resolution profiles of electron density in the ionosphere and plasmasphere
- Not mandated to profile neutral atmosphere (likely insufficient antenna gain)

GPS Observation Equations

Pseudorange:

$$P(t) = \rho(t) + c[dt_r(t) - dt^s(t-\tau)] + I(t) + T(t) + \varepsilon_P(t)$$

Carrier phase:

$$\Phi(t) = \lambda\,\phi(t)$$

$$= \rho(t) + c[dt_r(t) - dt^s(t-\tau)] - I(t) + T(t) + \lambda N + \varepsilon_\Phi(t)$$

t - signal reception time
λ - wavelength
c - speed of light
ρ - geometric range
τ - signal transit time
dt_r - receiver clock offset

dt^s - satellite clock offset
I - ionospheric delay
T - tropospheric delay
N - integer ambiguity
ε_P - pseudorange noise
ε_Φ - carrier phase noise

Ionospheric Propagation Delay

$$I_{L1(P)} = \frac{f_2^2}{f_2^2 - f_1^2}\left[P_{L1} - P_{L2}\right] + \varepsilon_{P(L1+L2)}$$

For absolute TEC, satellite and receiver inter-frequency biases must be accounted for

$$I_{L1(\Phi)} = \frac{f_2^2}{f_2^2 - f_1^2}\left[\left(\lambda_1 N_1 - \lambda_2 N_2\right) - \left(\Phi_1 - \Phi_2\right)\right] + \varepsilon_{\Phi(L1+L2)}$$


Phase levelling:

$$I = I_{\Phi} - \frac{\sum_{j=-\frac{n}{2}}^{\frac{n}{2}} w_j \left[I_{\Phi,j} - I_{P,j}\right]}{\sum_{j=-\frac{n}{2}}^{\frac{n}{2}} w_j}$$

$$TEC = \frac{1}{40.3} f_1^2 \, I_{L1}$$

1 TECU ≈
16 cm of L1 delay

Spaceborne GPS Limb Sounding

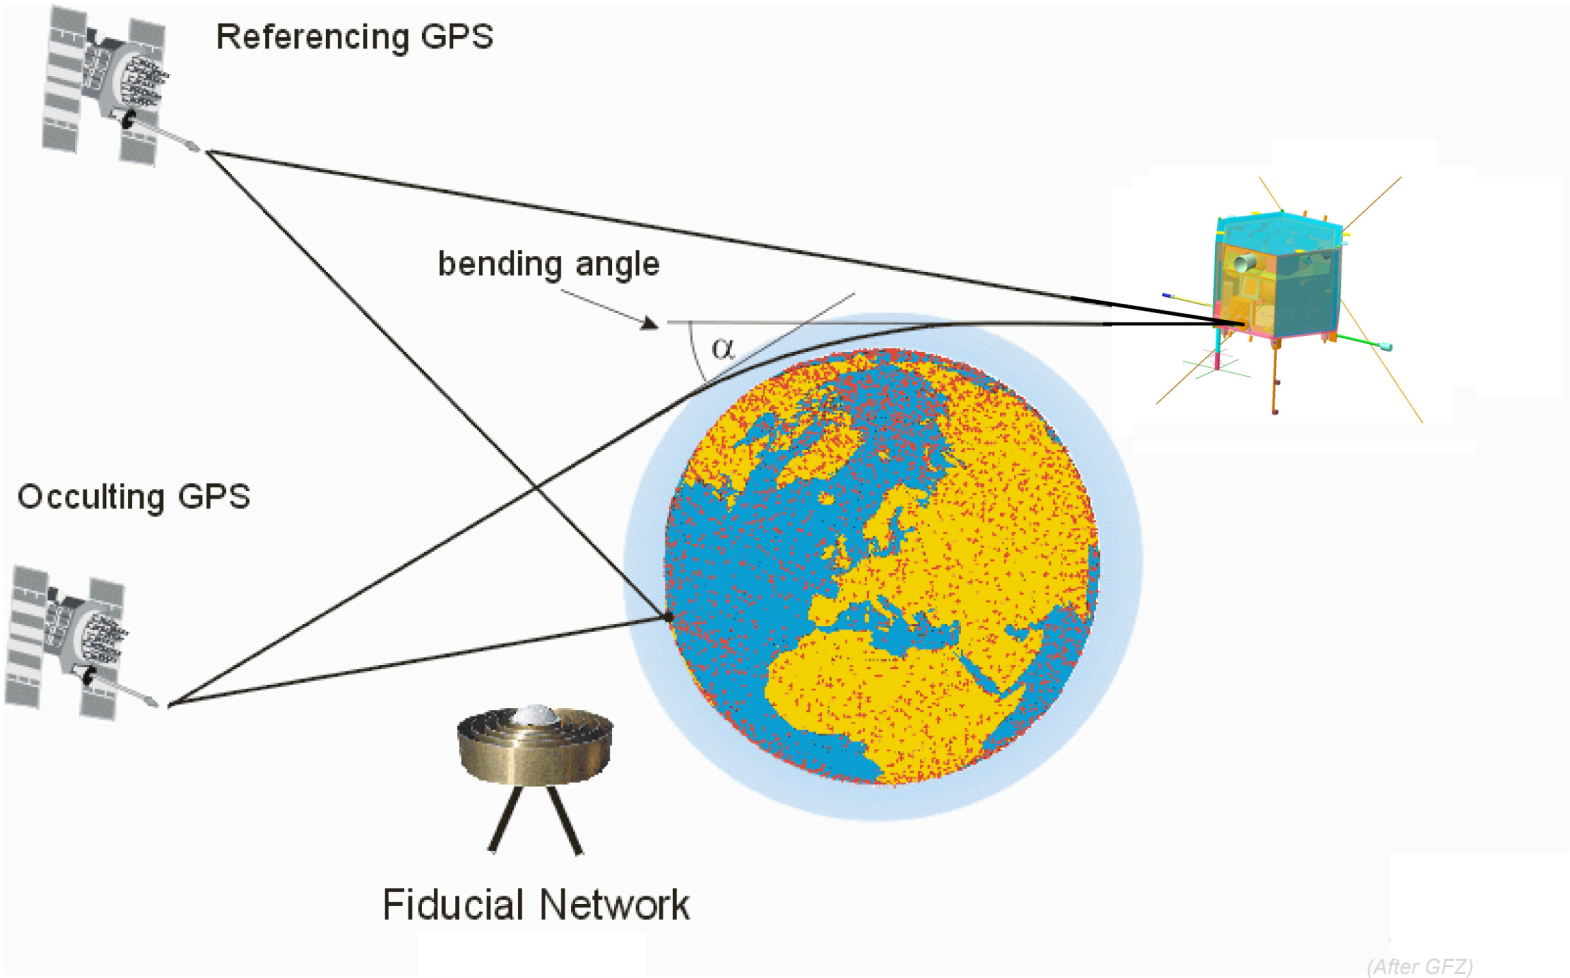

Abel Transform

TEC → Bending angle → Refractive index → Electron density

Bending angle $\longrightarrow \alpha \approx \frac{40.3}{f_1^2}\frac{dI}{da}$ ← Satellite – satellite TEC; ← Impact parameter

$$\ln[n(a)] = \frac{1}{\pi}\int_a^{\infty} \frac{\alpha(\xi)d\xi}{\sqrt{\xi^2 - a^2}}$$

$$n(a) \rightarrow N_e(a)$$


Resolution: $a \approx 3$ km (1 Hz data)

$N_e \approx 10^{11}$ m^{-3}


Receiver Selection

- Early in mission design, decision made to base GAP instrument on multiple COTS dual-frequency receivers
- Decision based on economics
- NovAtel OEM4-G2L selected

NovAtel OEM4-G2L

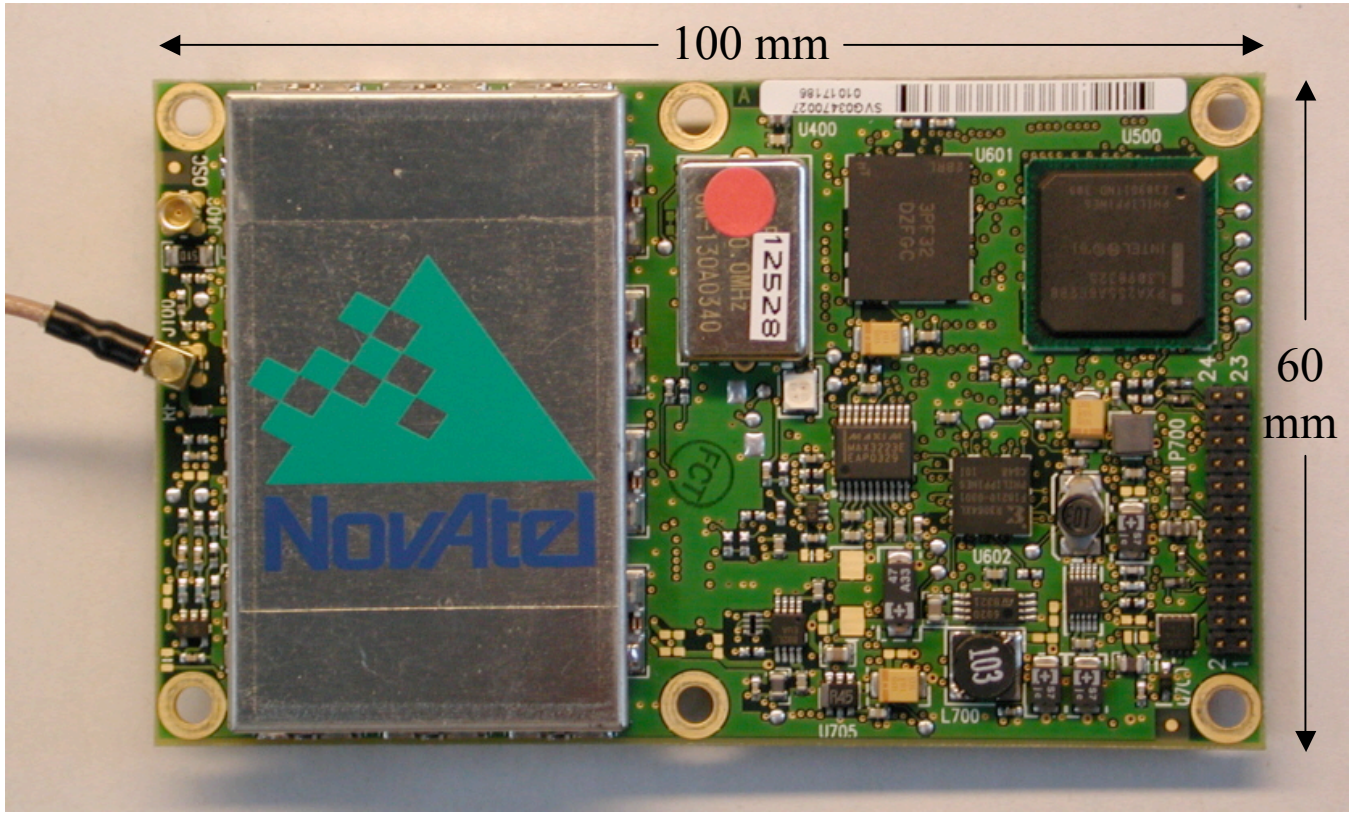

NovAtel OEM4-G2L

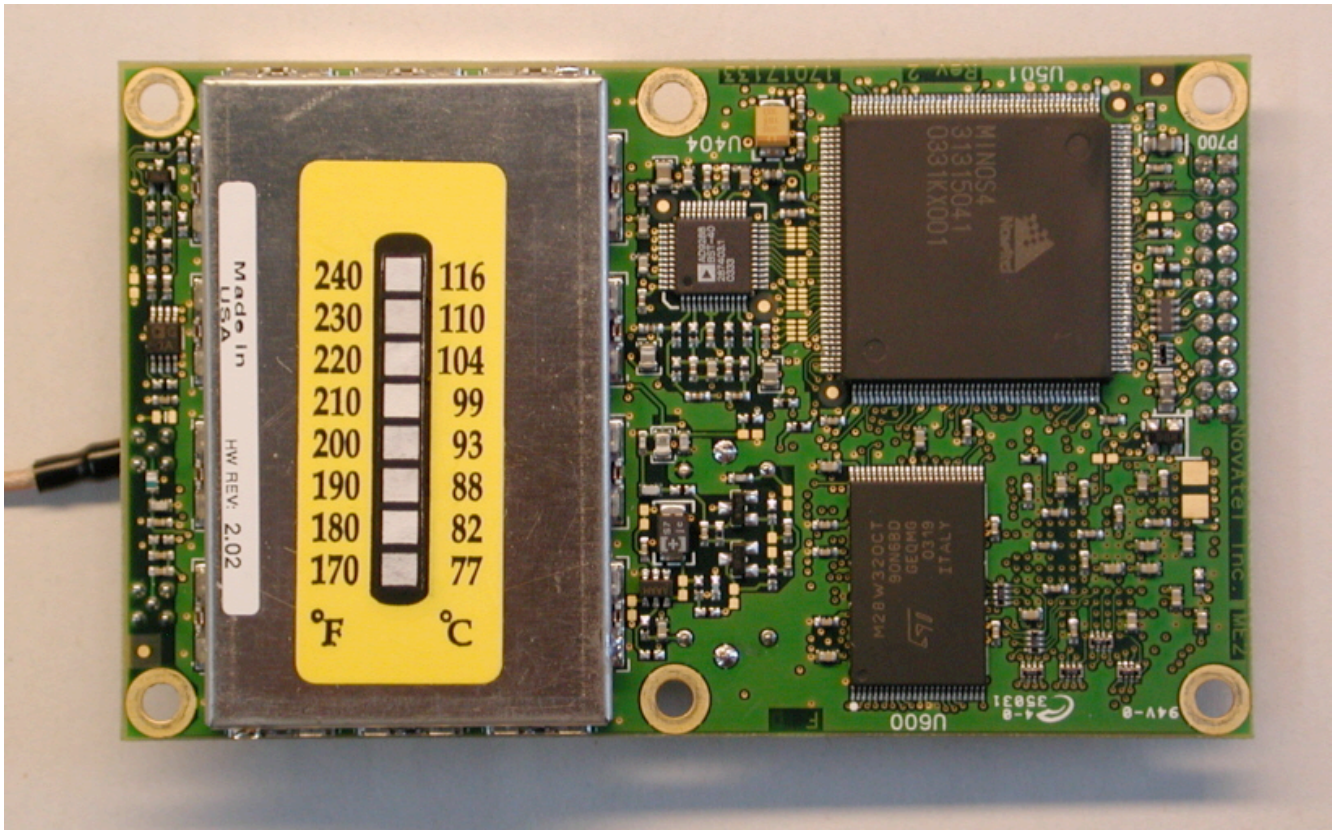


Antennas

- Positioning/attitude antennas: space-qualified Sensor Systems S67-1575-14M dual-frequency passive patch antenna
- Occultation antenna: modified NovAtel GPS-702 “Pinwheel” antenna


GAP Functional Description

- Instrument consists of:
  - An interface card
  - Power supply card
  - 5 GPS cards (includes one spare)
  - 5 GPS antennas and LNAs
  - Antenna/LNA switch

- GAP-A and GAP-O functions combined into a single instrument

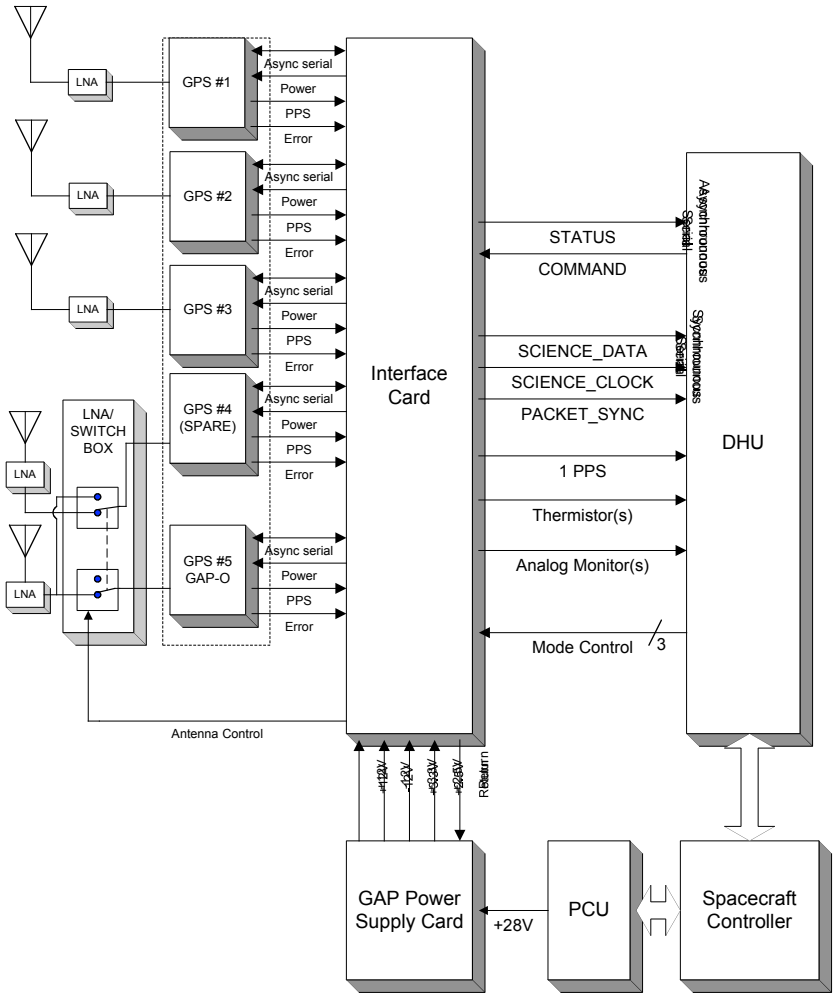

Instrument Overview

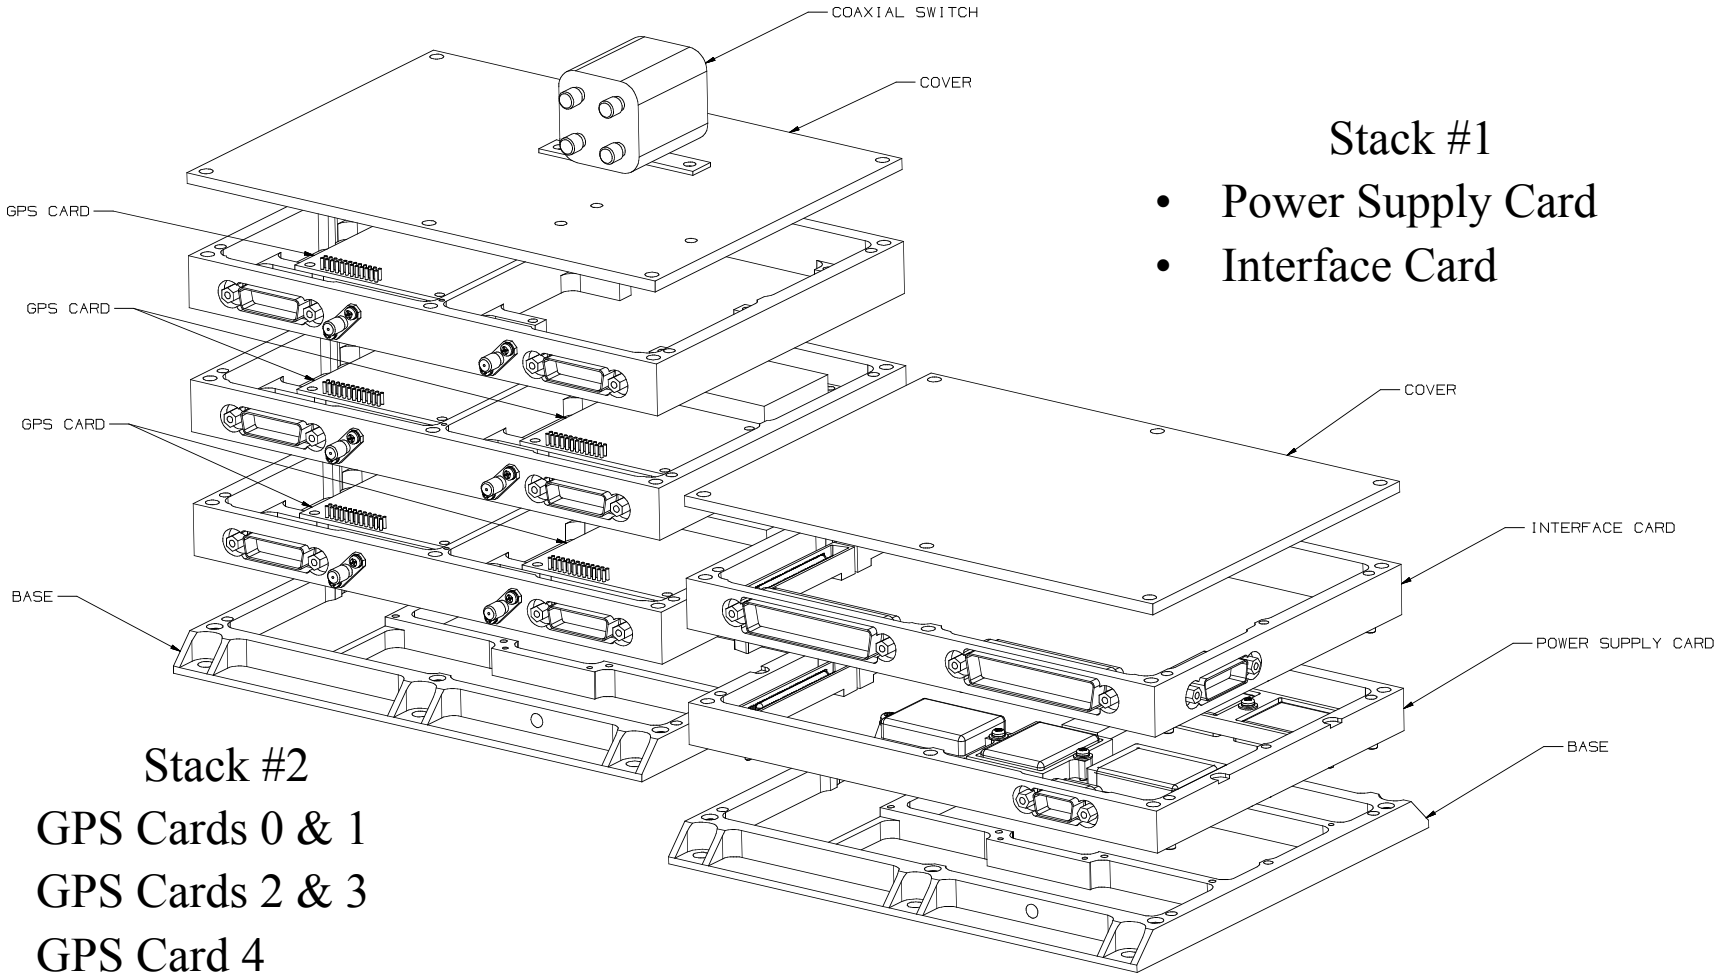

Stack #1

- Power Supply Card
- Interface Card


Stack #2

- GPS Cards 0 & 1
- GPS Cards 2 & 3
- GPS Card 4
- Coaxial switch


GAP Development and Testing

- A series of tests were carried out to see if the OEM4-G2L could withstand the rigors of spaceflight:
  - Tracking (at ESTEC and UNB)
  - Radiation (by DLR)
  - Thermal vacuum (at Bristol Aerospace)
- Real-time attitude software development and testing at UNB
- Performance tests at U. of C. with spacecraft bus simulator and GPS signal re-radiator


DSP and SPP Controller

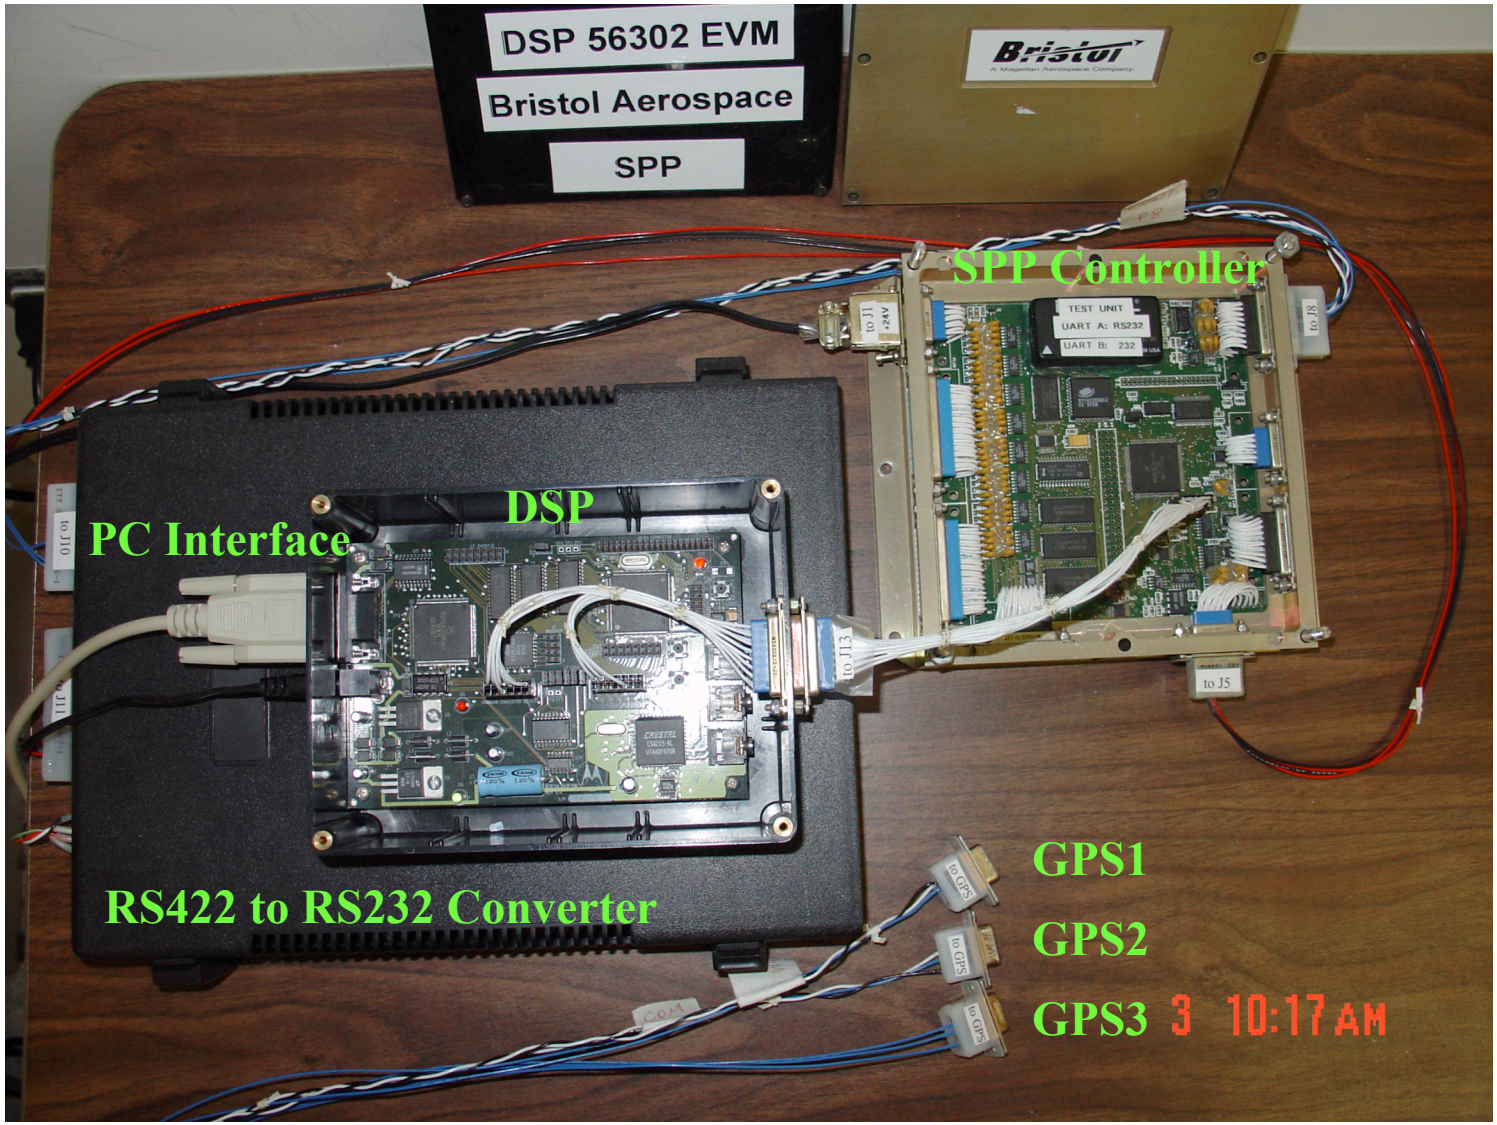

NovAtel OEM4 Flexpack-G2L, Connected to a Spirent STR4760

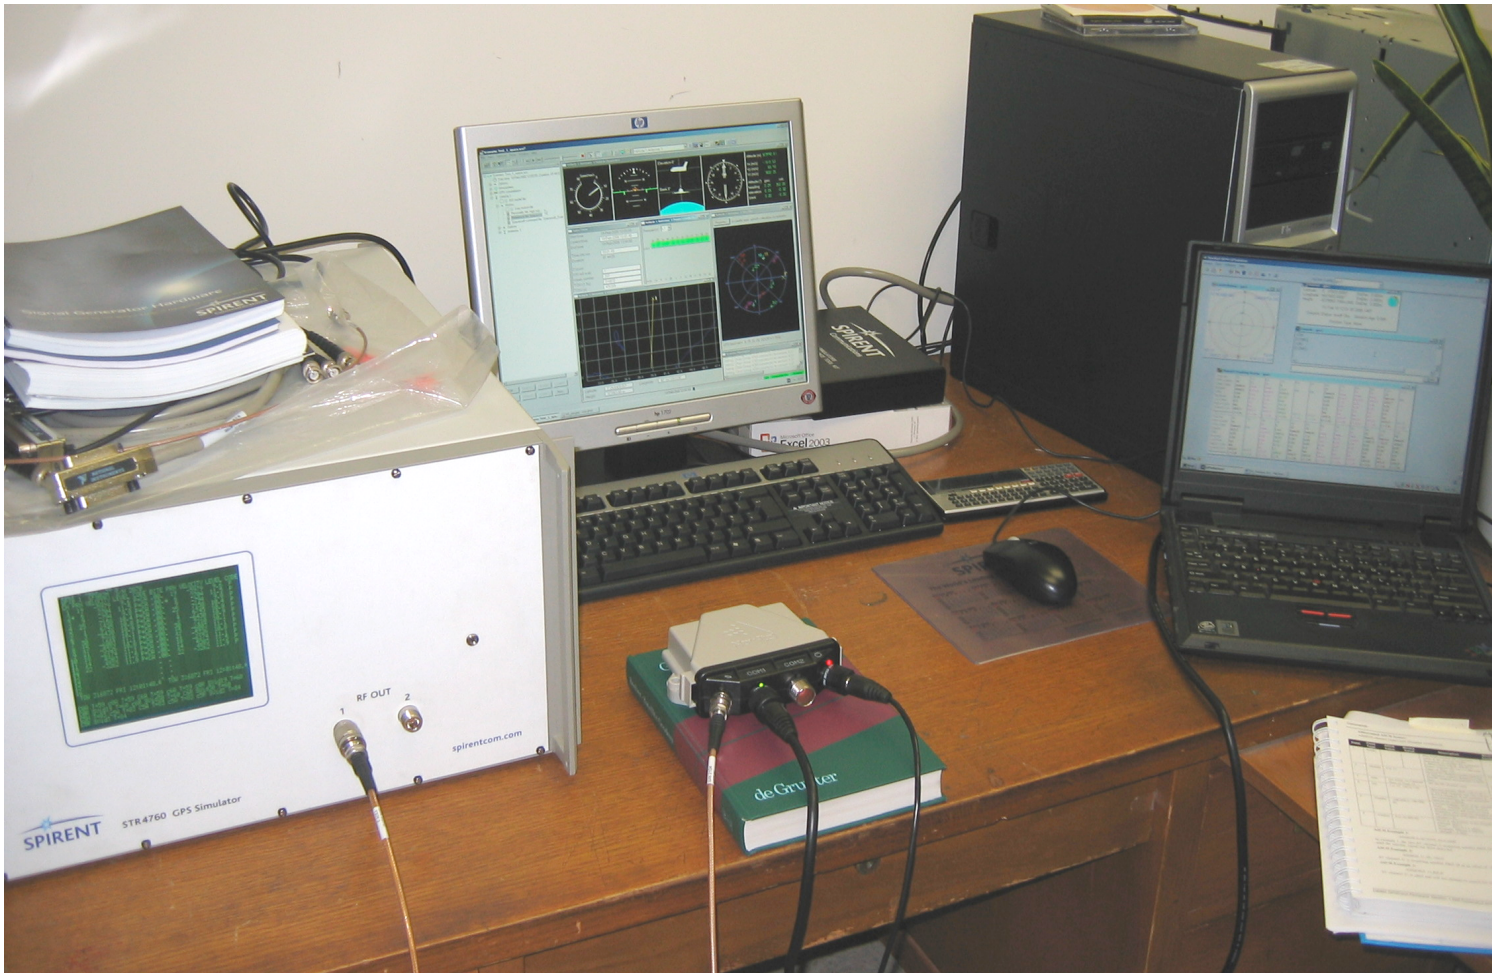

Attitude Test Platform - 3D Motion Table

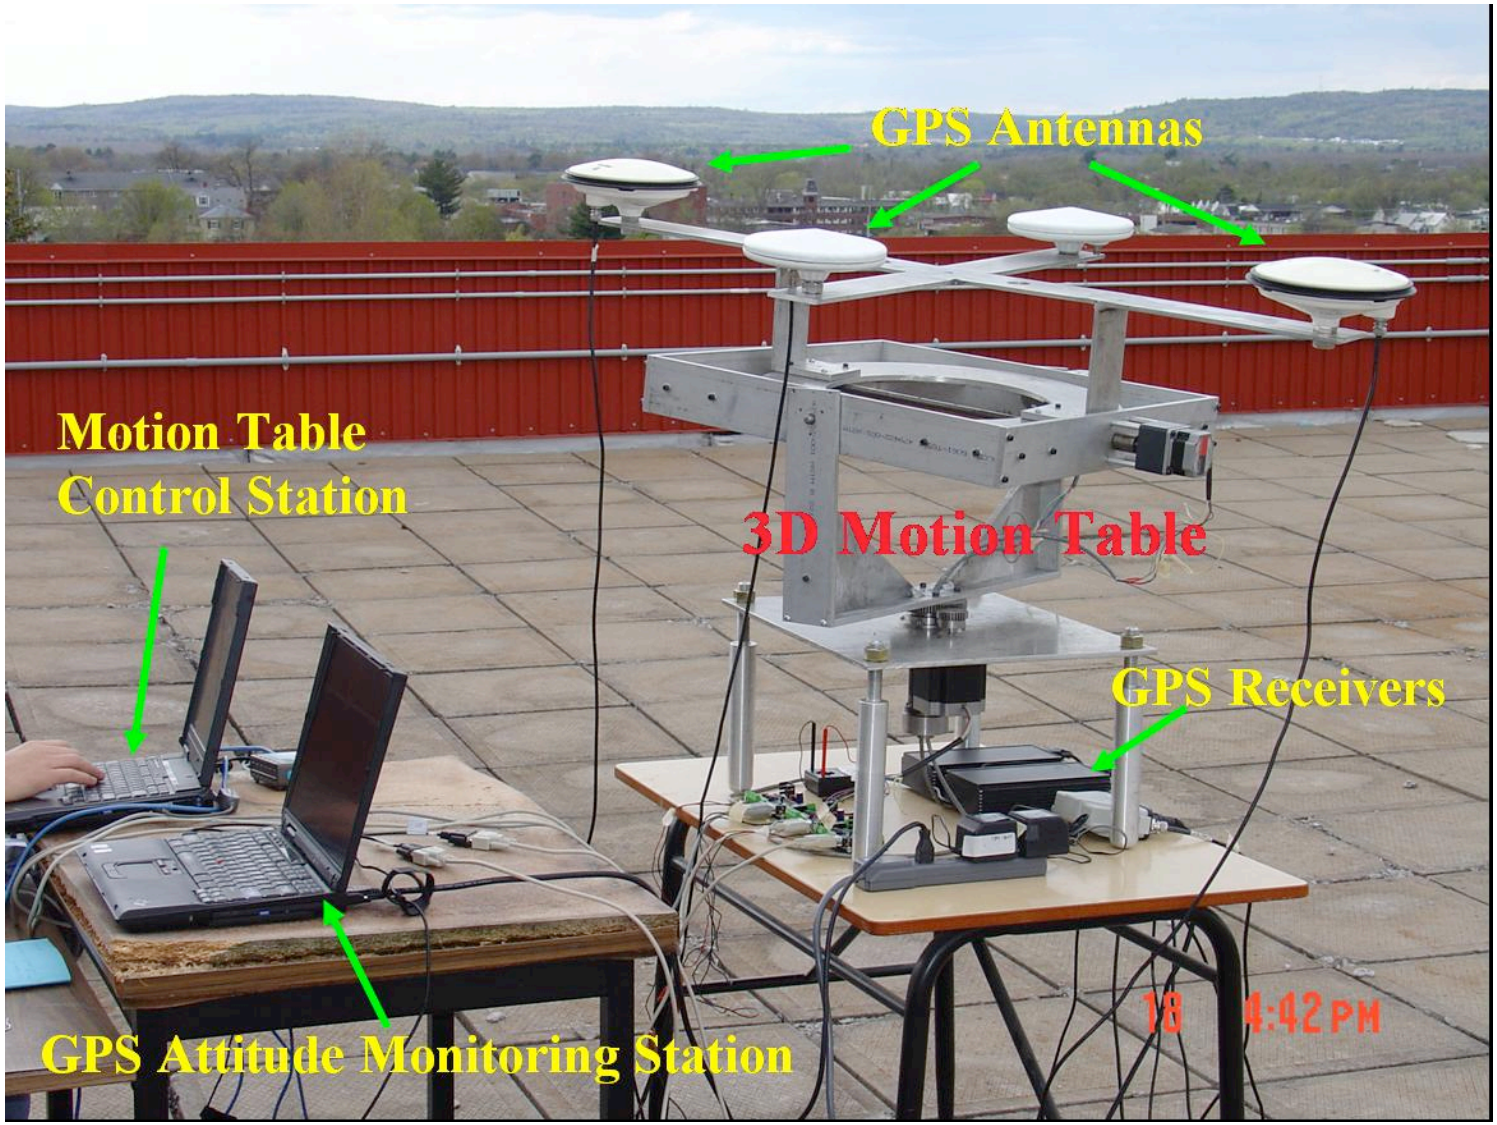

Future Work

- Complete instrument tests, including further performance tests with live GPS signals

- Complete quick-look data validation software

- Develop automated data processing and archiving facility

Acknowledgements

- Canadian Space Agency
- Natural Sciences and Engineering Research Council of Canada
- Deutsche Zentrum für Luft- und Raumfahrt (DLR)
- Fraunhofer Institute for Technological Trend Analysis
- Bristol Aerospace
- MacDonald, Dettwiler & Associates (MDA)
- University of Calgary